

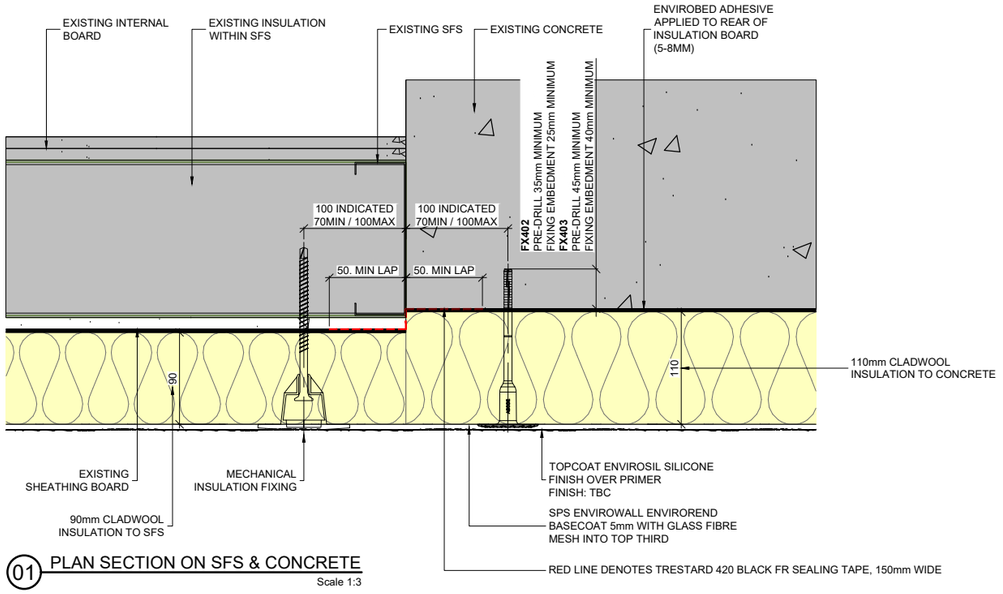


01 PLAN SECTION ON SFS & CONCRETE
Scale 1:3

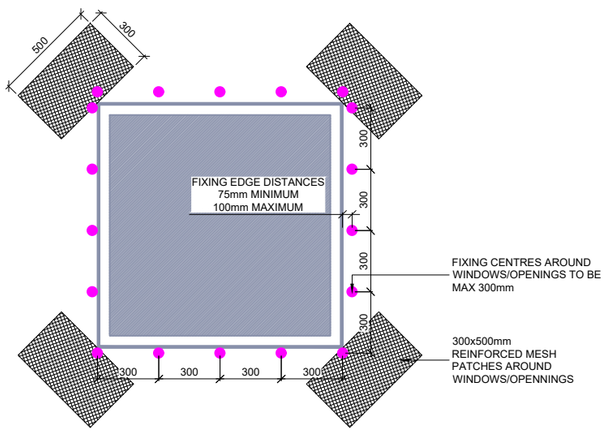


03 ELEVATION ON WINDOW
Scale 1:15

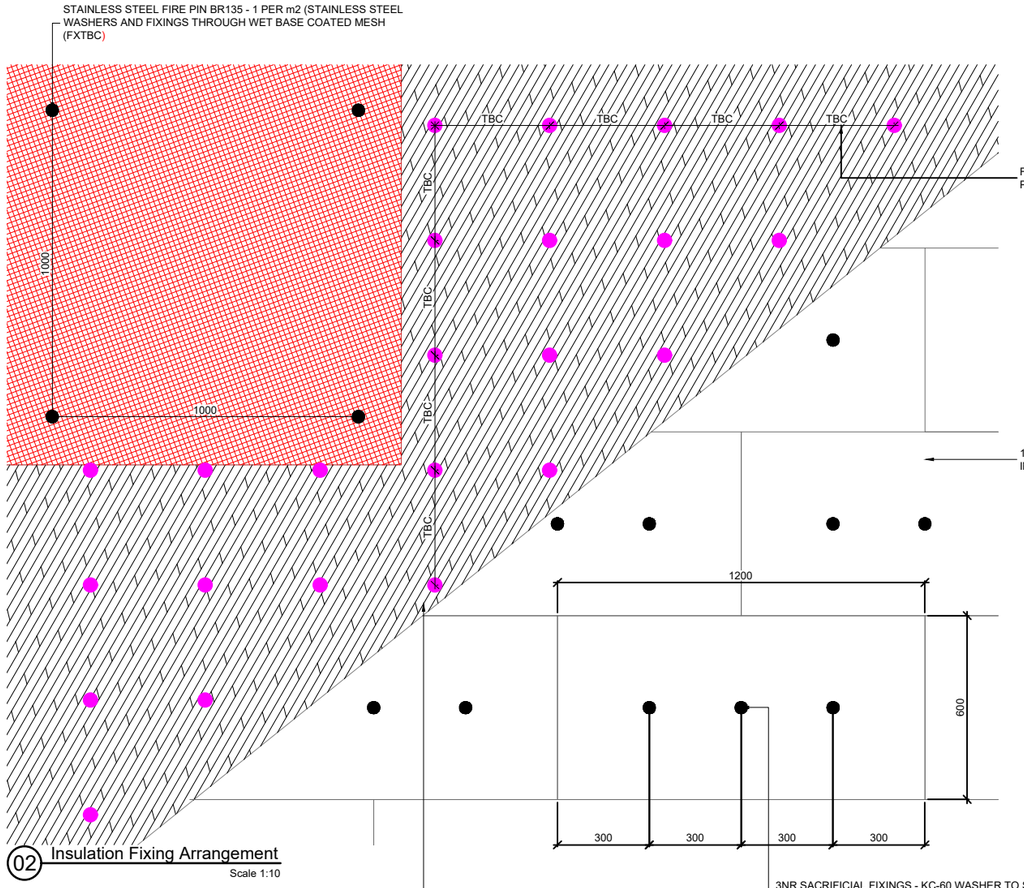


02 Insulation Fixing Arrangement
Scale 1:10

INSTALLATION SEQUENCE

1) INSTALL ALUMINIUM BASE TRACK, PVC CLIP & MESH AT BASE OF RENDERED AREA. FIXED AT 300mm CENTRES WITH FX404 (SFS) FX405 (CONCRETE) TO REAR OF INSULATION BOARD USING A NOTCHED TROWEL
2) PLACE BOARD ONTO Y-WALL/ CONCRETE AND FIX WITH 1 NR FX401 (SFS) FX403 (CONCRETE) DEPENDENT ON INSULATION THICKNESS & SUBSTRATE. **(SACRIFICIAL FIXING)**
3) APPLY FIRST LAYER OF BASECOAT USING A NOTCHED TROWEL & FLOATED WITH A DARBY FLOAT. THICKNESS SHOULD BE A MINIMUM OF 3mm
4) IMMEDIATELY AFTER, APPLY GLASS FIBRE MESH INTO BASECOAT USING THE TROWEL, ASSURING THE MESH IS OVERLAPPED BY AT LEAST 100mm AT JOINTS
4) THEN FIX WITH FX402 (SFS) FX404 (CONCRETE) DEPENDENT ON SUBSTRATE AT 375mm CENTRES (7 FIXINGS PER m2). AROUND WINDOWS AND OPENINGS FIXINGS TO BE AT 300mm CENTRES
5) THEN COVER OVER FIXINGS WITH 100x100mm PATCHES OF MESH & BASE COAT. OVERALL THICKNESS SHOULD BE 5mm
6) AROUND OPENINGS, A 300x500mm PIECE OF REINFORCED MESH IS TO BE USED DIAGONALLY IN EACH CORNER AS SHOWN IN DETAIL 3
7) ONCE BASECOAT HAS CURED, USING A ROLLER, APPLY A THIN LAYER OF PRIMER
8) THEN APPLY 1.5mm OF GRANOL SILICONE TOPCOAT

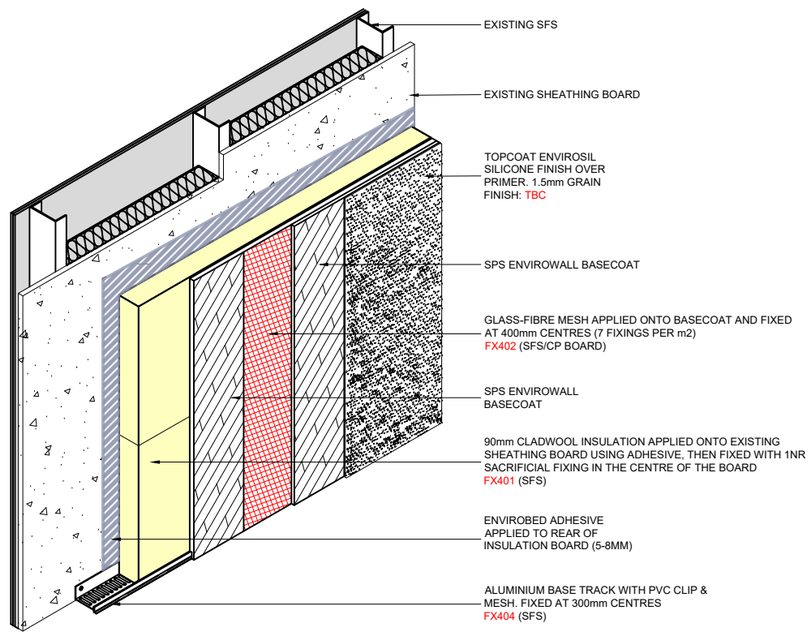

04 Isometric view on render build up on SFS
Scale 1:10

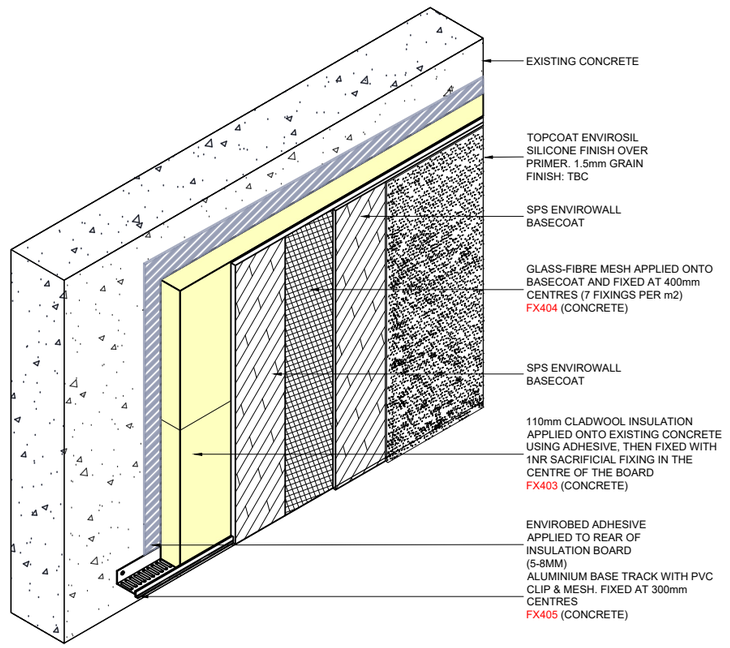


05 Isometric view on render build up on concrete
Scale 1:10

© Submitted toDevice - Regency Facades Ltd Documents - Projects\1761 - The Summit Ltd_Detail\02 Drawings\01 RFL Working Drawings\TSB-RFL-ZZ-ZZ-DR-W-001201_P01.Render Stats Drawing.dwg

Document Reference: RF_007.10

REGENCY FACADES

Key Plan:



UNIT 11, MORTIMERS TRADING ESTATE, ROMSEY ROAD, OWER, HAMPSHIRE. SO51 6AL

TEL: 02382 000077
EMAIL: ENQUIRIES@REGENCYFACADES.CO.UK
WEB: WWW.REGENCYFACADES.CO.UK

COPYRIGHT NOTE:
THIS DRAWING AND ITS CONTENT IS COPYRIGHT OF REGENCY FACADES LIMITED.
ALL RIGHTS RESERVED
ANY REDISTRIBUTION OR REPRODUCTION OF PART OR ALL OF THE CONTENTS IN ANY FORM IS PROHIBITED AND YOU MAY NOT, EXCEPT WITH WRITTEN PERMISSION FROM REGENCY FACADES LIMITED.

Notes:

HATCH DENOTES EXISTING/WORKS **BY OTHERS**

RFL DRAWINGS ARE SHOWING INDICATIVE INTERNAL FINISHES.
INTERNAL FIT OUT COMPANY TO PROVIDE PROJECT RELATED DRAWINGS FOR REVIEW. ANY COMMENTS RELATING TO INTERNAL FINISHES WILL BE IGNORED.

Rev	By	Description	Date	CH
C01	MHY	CONSTRUCTION ISSUE	27/07/2026	RFL
P01	MHY	FIRST ISSUE	10/10/25	RFL

Status: **FOR CONSTRUCTION**

Client: BARRATT REDROW

Project: 1761 THE SUMMIT

Title: SPECIFICATION DRAWING SPS ENVIROWALL DIRECT FIX

Drawn By	Checked By
MHY	BB
Scale: AS NOTES	Date: 27/10/2025

TSB-RFL-ZZ-ZZ-DR-W-001201 C01

SHEET & REVISION